




| REVISIONS |             |         |      |
|-----------|-------------|---------|------|
| REV/批号    | DESCRIPTION | APPROVE | DATE |
|           |             |         |      |

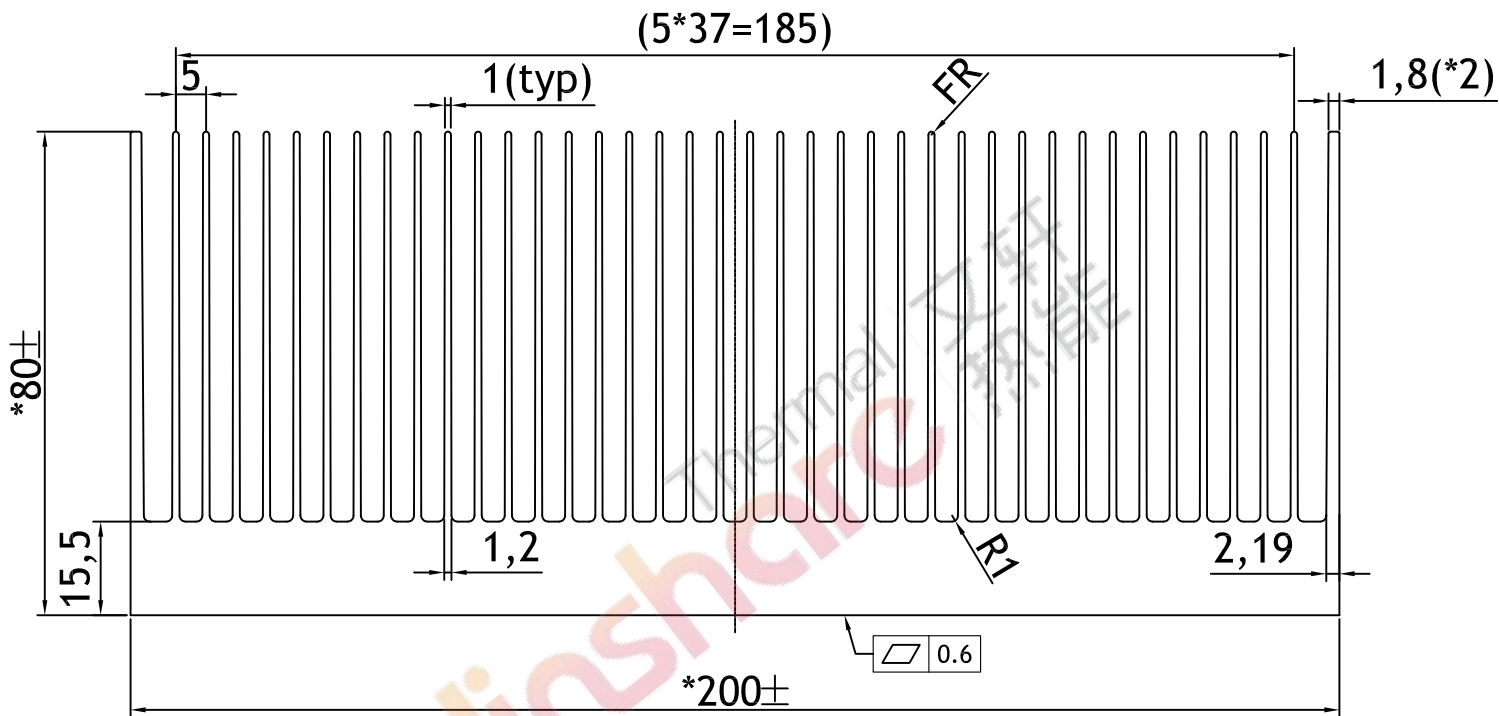

技术要求

1. 装饰面为: \_\_\_\_\_
2. 基材验收标准按GB/T6892-2006执行
3. \* 为重要尺寸
4. 铝挤硬度: 68-75HV

注:

1. 材质: AL6063-T5, 硬度10-13°
2. 表面不可有手感刮碰伤、线条。
3. 截面积: 6068.30MM<sup>2</sup>, 米重: 16.69Kg
4. 标\*号为QC重点检验尺寸
5. 1米内的扭曲度0.5以内
6. 模号: Y3763

|                        |            |
|------------------------|------------|
| REVISED:               | 1.0        |
| MATERIAL:              | AL 6063-T5 |
| TOLERANCE UNLESS NOTED |            |
| Linear: 0-10±0.15      |            |
| 10-30±0.2              |            |
| 30-50±0.3              |            |
| 50-100±0.4             |            |
| ANGLE: ±0.50°          |            |



|              |       |              |            |       |       |
|--------------|-------|--------------|------------|-------|-------|
| TITLE:       |       | 铝挤型          |            |       |       |
| Part Number: |       | 03-200098-10 |            |       |       |
| APPROVE      | CHK'D | DRAW         | DATE       | UNITS | SCALE |
|              |       | 曹开强          | 2015-01-13 | mm    | 1:1   |